Chromalock

Plug In Panel Mounting Modules — CASE48-8/11

TECHNICAL FEATURES

- PLUG IN MODULE CASE WITH EITHER 8 PIN OR 11 PIN HEADERS
- CHOICE OF FRONT PANEL "A", "B" AND "C"
- CHOICE OF CLEAR PERSPEX COVER
- EACH UNIT INCLUDES PANEL MOUNTING KIT
- ACCEPTS UP TO TWO PCB'S

TECHNICAL SPECIFICATION

CASE MATERIAL	Light grey polycarbonate
HEADER MATERIAL	Black glass filled Nylon
HEADER WIRE	Approximately 4 ins colour coded PVC covered 24 AWG
OPERATING TEMPERATURE	110 ^{O}C maximum
VOLTAGE BREAKDOWN	2500V r.m.s. between pins
CURRENT RATING	5 amp maximum (mated)

ORDERING DETAILS

CASE 48-8
CASE 48-11

WINDOW 500
FRONT PANEL A
FRONT PANEL B
FRONT PANEL C

SEE PAGES 7-8 FOR BASES AND ACCESSORIES

OPERATIONAL FEATURES

Advantages of using the Modules include reduced assembly and production times due to the following features:

- Front panel "A" includes formed holes to suit buttons and display mounting
- Front panel "B" includes formed holes to suit Thumbwheel switch and display mounting
- Front panel "C" includes formed holes to suit LED's and potentiometer mounting
- Two sets of board guides suitable for retaining one or two PCBs.
- Will fit all known 8/ 11 pin octal / sub-magnal surface or chassis mounting bases
- Holding lugs moulded into the case for use with 8-pin/11-pin retaining clip bases type P2CF08(8-pin) or P2CF11(11-Pin)
- Panel mounting versions

INTERNAL & EXTERNAL FEATURES

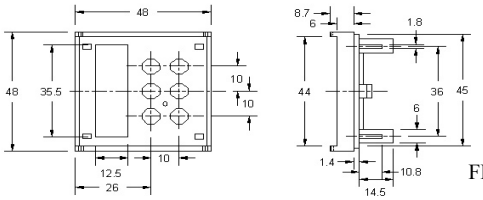

FRONT PANEL A

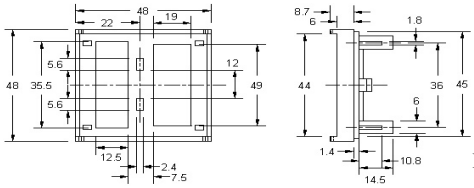

FRONT PANEL B

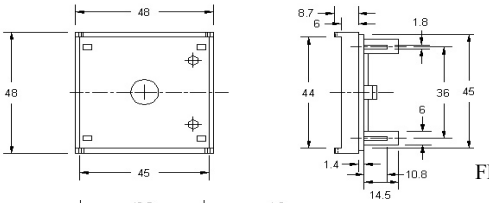

FRONT PANEL C



WINDOW 500

CASE DIMENSIONS

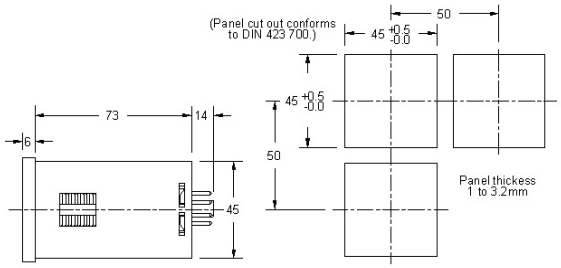

Dimensions in mm

TEL: 02476 466279 (24hrs) Fax: 02476 465298 E-Mail:admin@chromalock.com **Website:** www.chromalock.com